
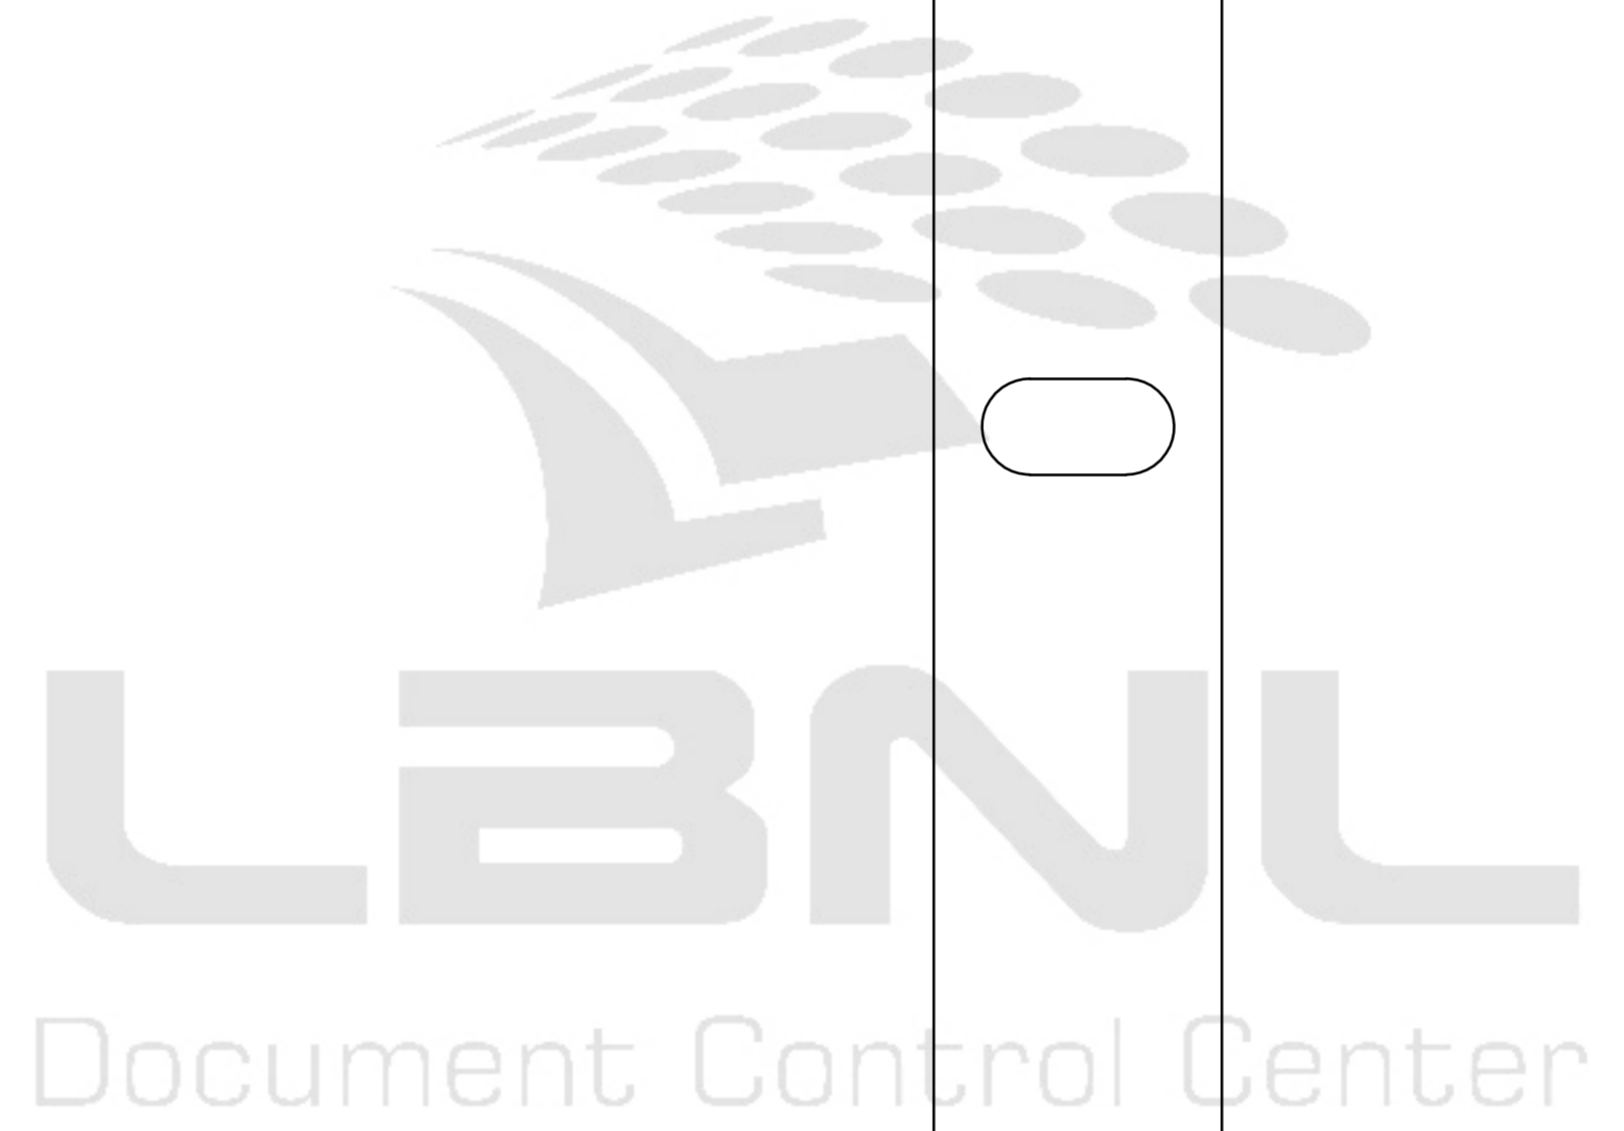
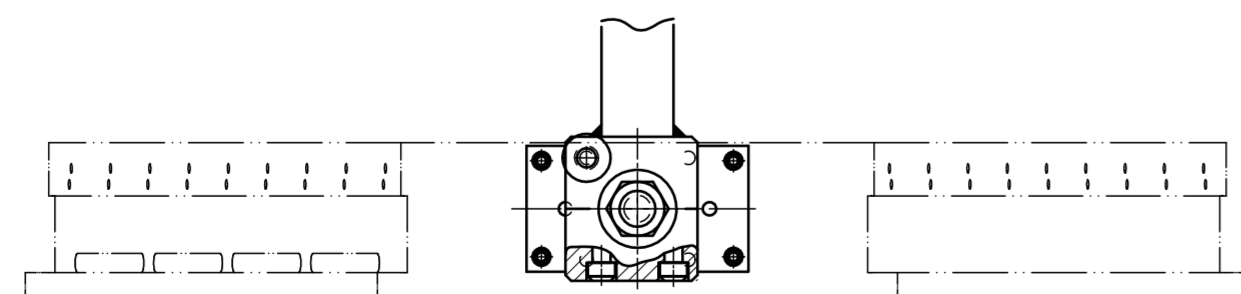
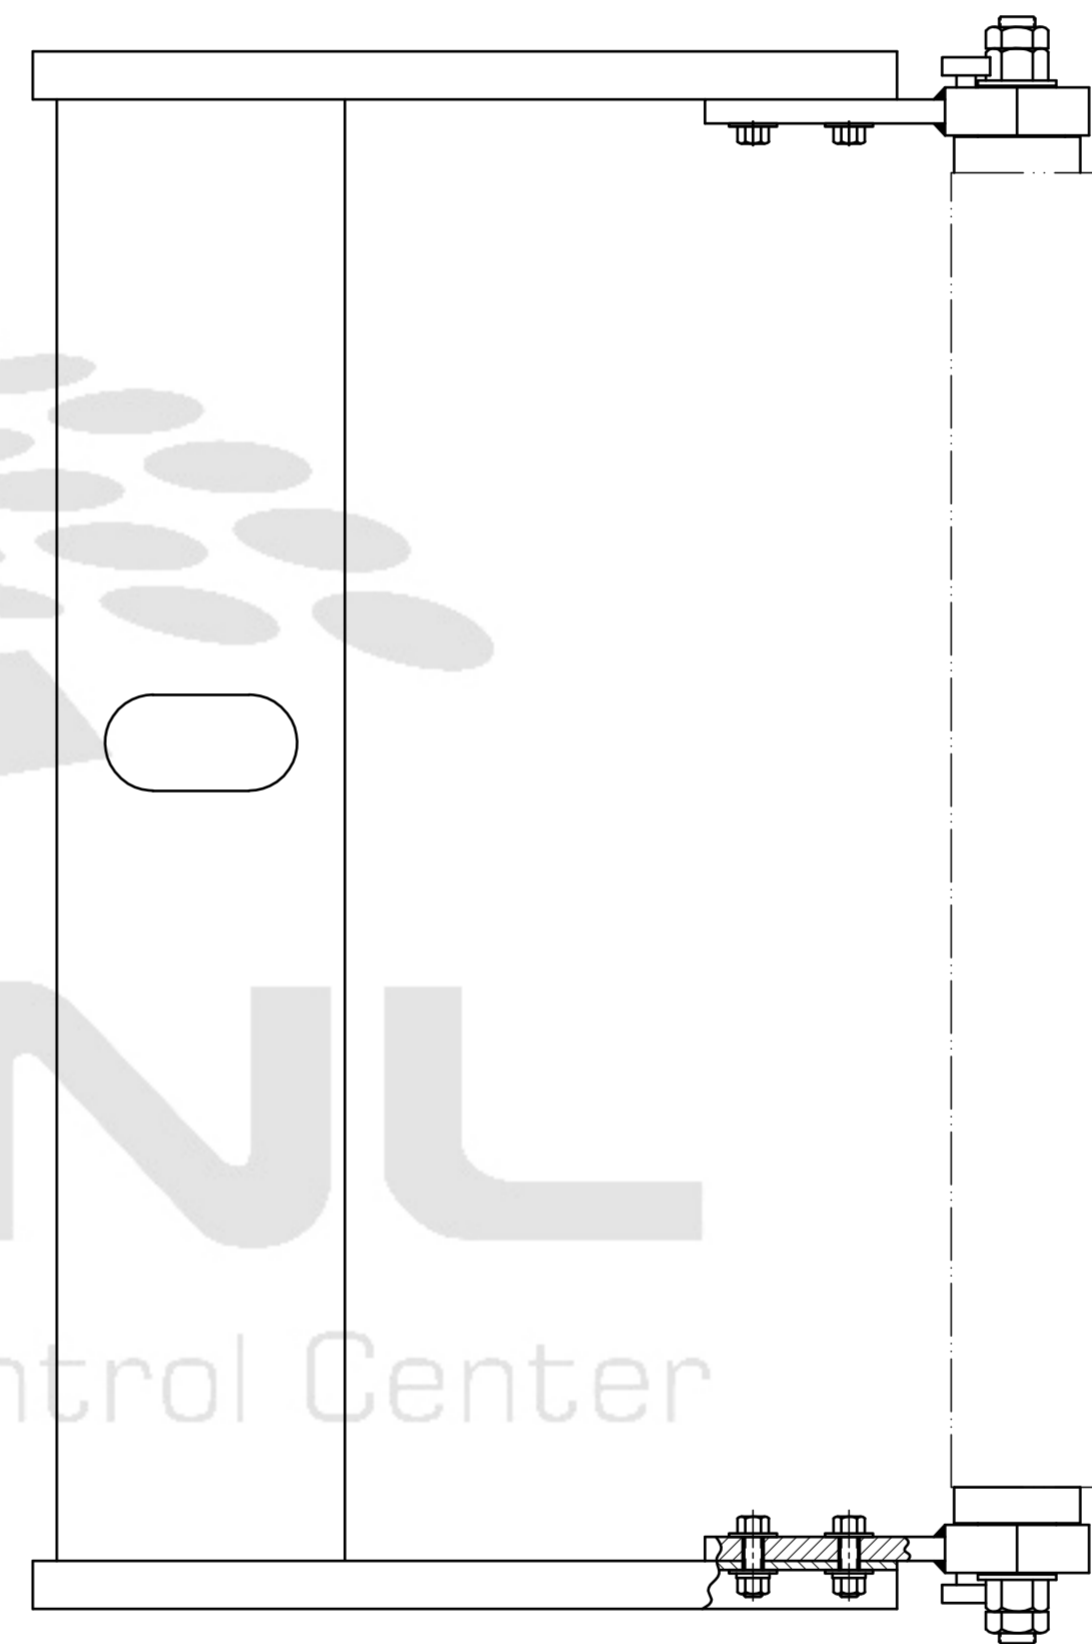


8 7 6 5 4 3 2 1

REQ	ITEM	PART NUMBER	DESCRIPTION
REF	1	24A0345	OUTER SECTOR STRONGBACK
4	2	24A0372	CARRYING HANDLE
2	3	24A0383	TRUNION SHAFT
2	4	24A0393	TRUNION HEAD
4	5	24A0401	TEFLON WASHER
1	6	24A0424	INNER SECTOR SPREADER BAR
2	7		HAND RETRACT. PLUNGER, CARR-LANE # CL-8-HRP
2	8		NUT, REG 3/4-10 STL HARD. CARR-LANE # CL-12-HN
2	9		NUT, JAM 3/4-10 STL HARD. CARR-LANE # CL-12-JN
2	10		WASHER, FLAT, 3/4, CARR-LANE # CL-4-FW
4	11		HEX HD M S .375-16UNC-2A x 1.75 LG, STEEL
4	12		HEX NUT, REG. 75-16UNC-2B, STEEL
8	13		WASHER, FLAT, .375 NOMINAL, STEEL
4	14		WASHER, LOCK, .375 NOMINAL, STEEL
8	15		HEX HD M S .250-20UNC-2A x 1.13 LG, STEEL
8	16		WASHER, LOCK, .25 NOMINAL, STEEL

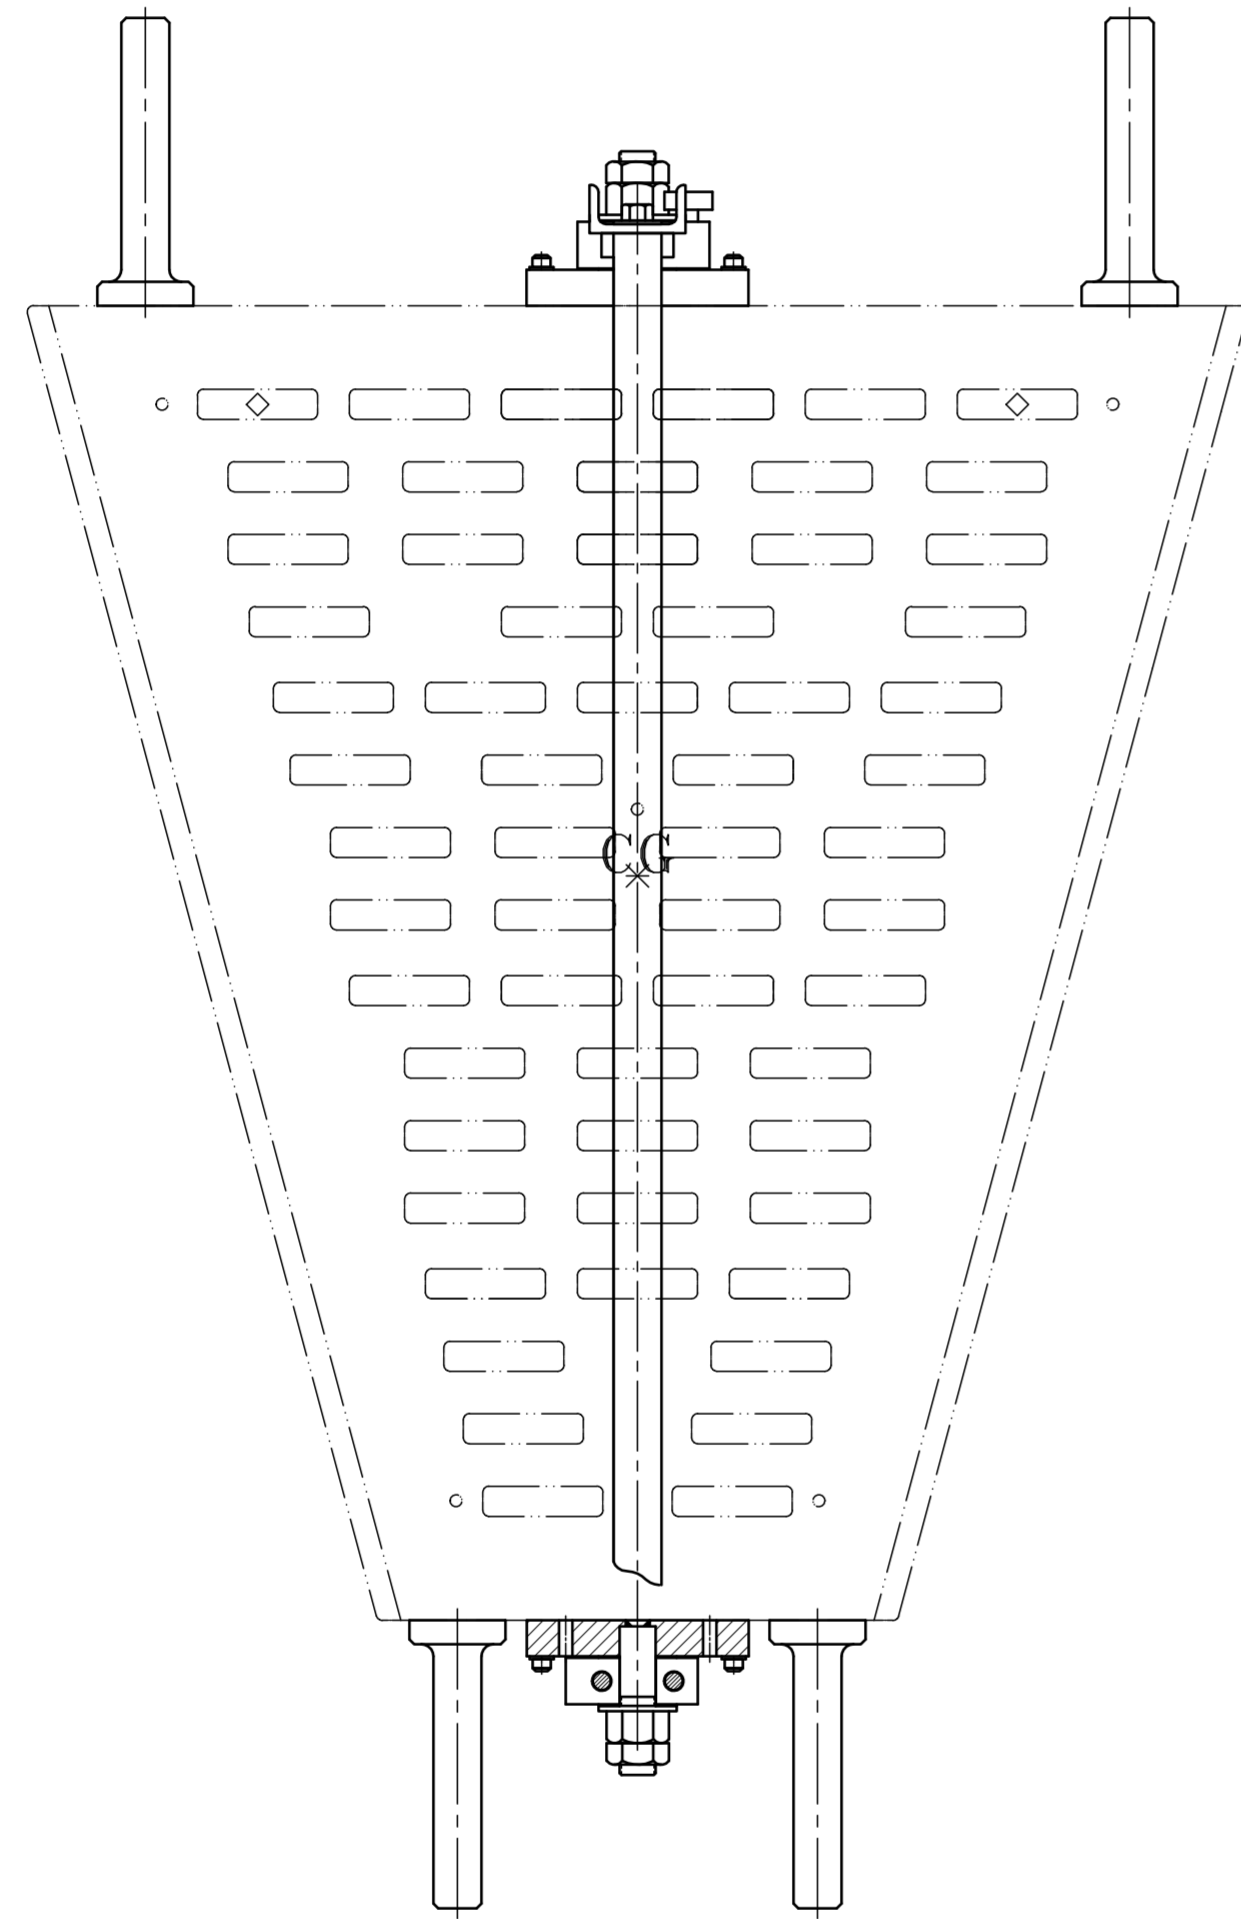

24A0364

UNLESS OTHERWISE SPECIFIED		SHOP ORDERS		LAWRENCE BERKELEY LABORATORY UNIVERSITY OF CALIFORNIA-BERKELEY			
.X ± .1		FRAC. ± 1/64		ACCT. NO.	SERIAL NO.		
.XX ± .01		ANGLES ± 1°		DATE ISSD	DATE RECD.	NO. RECD.	
.XXX ± .001		FINISH 125√		DELIVER TO			
THREADS ARE CLASS 2				SURFACE TREATMENT			
CHAMFER ENDS OF ALL SCREW THREADS 30°				PATENT CLEAR			
CUT 1.5 PITCH THRO RELIEF WITH ROUND NOSE TOOL				DWG. TYPE			
ON MACHINE CUT THREADS.				ASSEMBLY			
BREAK EDGES .016 MAX. ON MACHINED WORK				DWG. J. BOEHM		DATE 93-03-11	SCALE 1:4
REMOVE BURRS WELD SPLATTER & LOOSE SCALE				CHK. J. BERCOVITZ		DATE 93-03-11	DO NOT SCALE PRINTS
REFERENCES: ANSI Y14.5 & B46.1.				MICROFILMED		DESIGN ACCT. NO. 8052-24	SR-02-04
REV		DWG	CHK	ZONE	DATE	CHANGES	
						24A0364	

Officially Released to the LBNL Document Control Center
Released: DCC Auth Key: 8UEIUDL3VJ