


24A0372	REQD	ITEM	PART NUMBER	DESCRIPTION
	1	1		BAR, ROUND, Ø 2.00, ALUMINUM 6061-T6
	1	2		SCREW, SET, SCKT, .500-13UNC-2A x 1.5 LG, STEEL, SELF LOCKING

.500-13UNC-2B TAP x 1.0 DEEP INTO ITEM 1

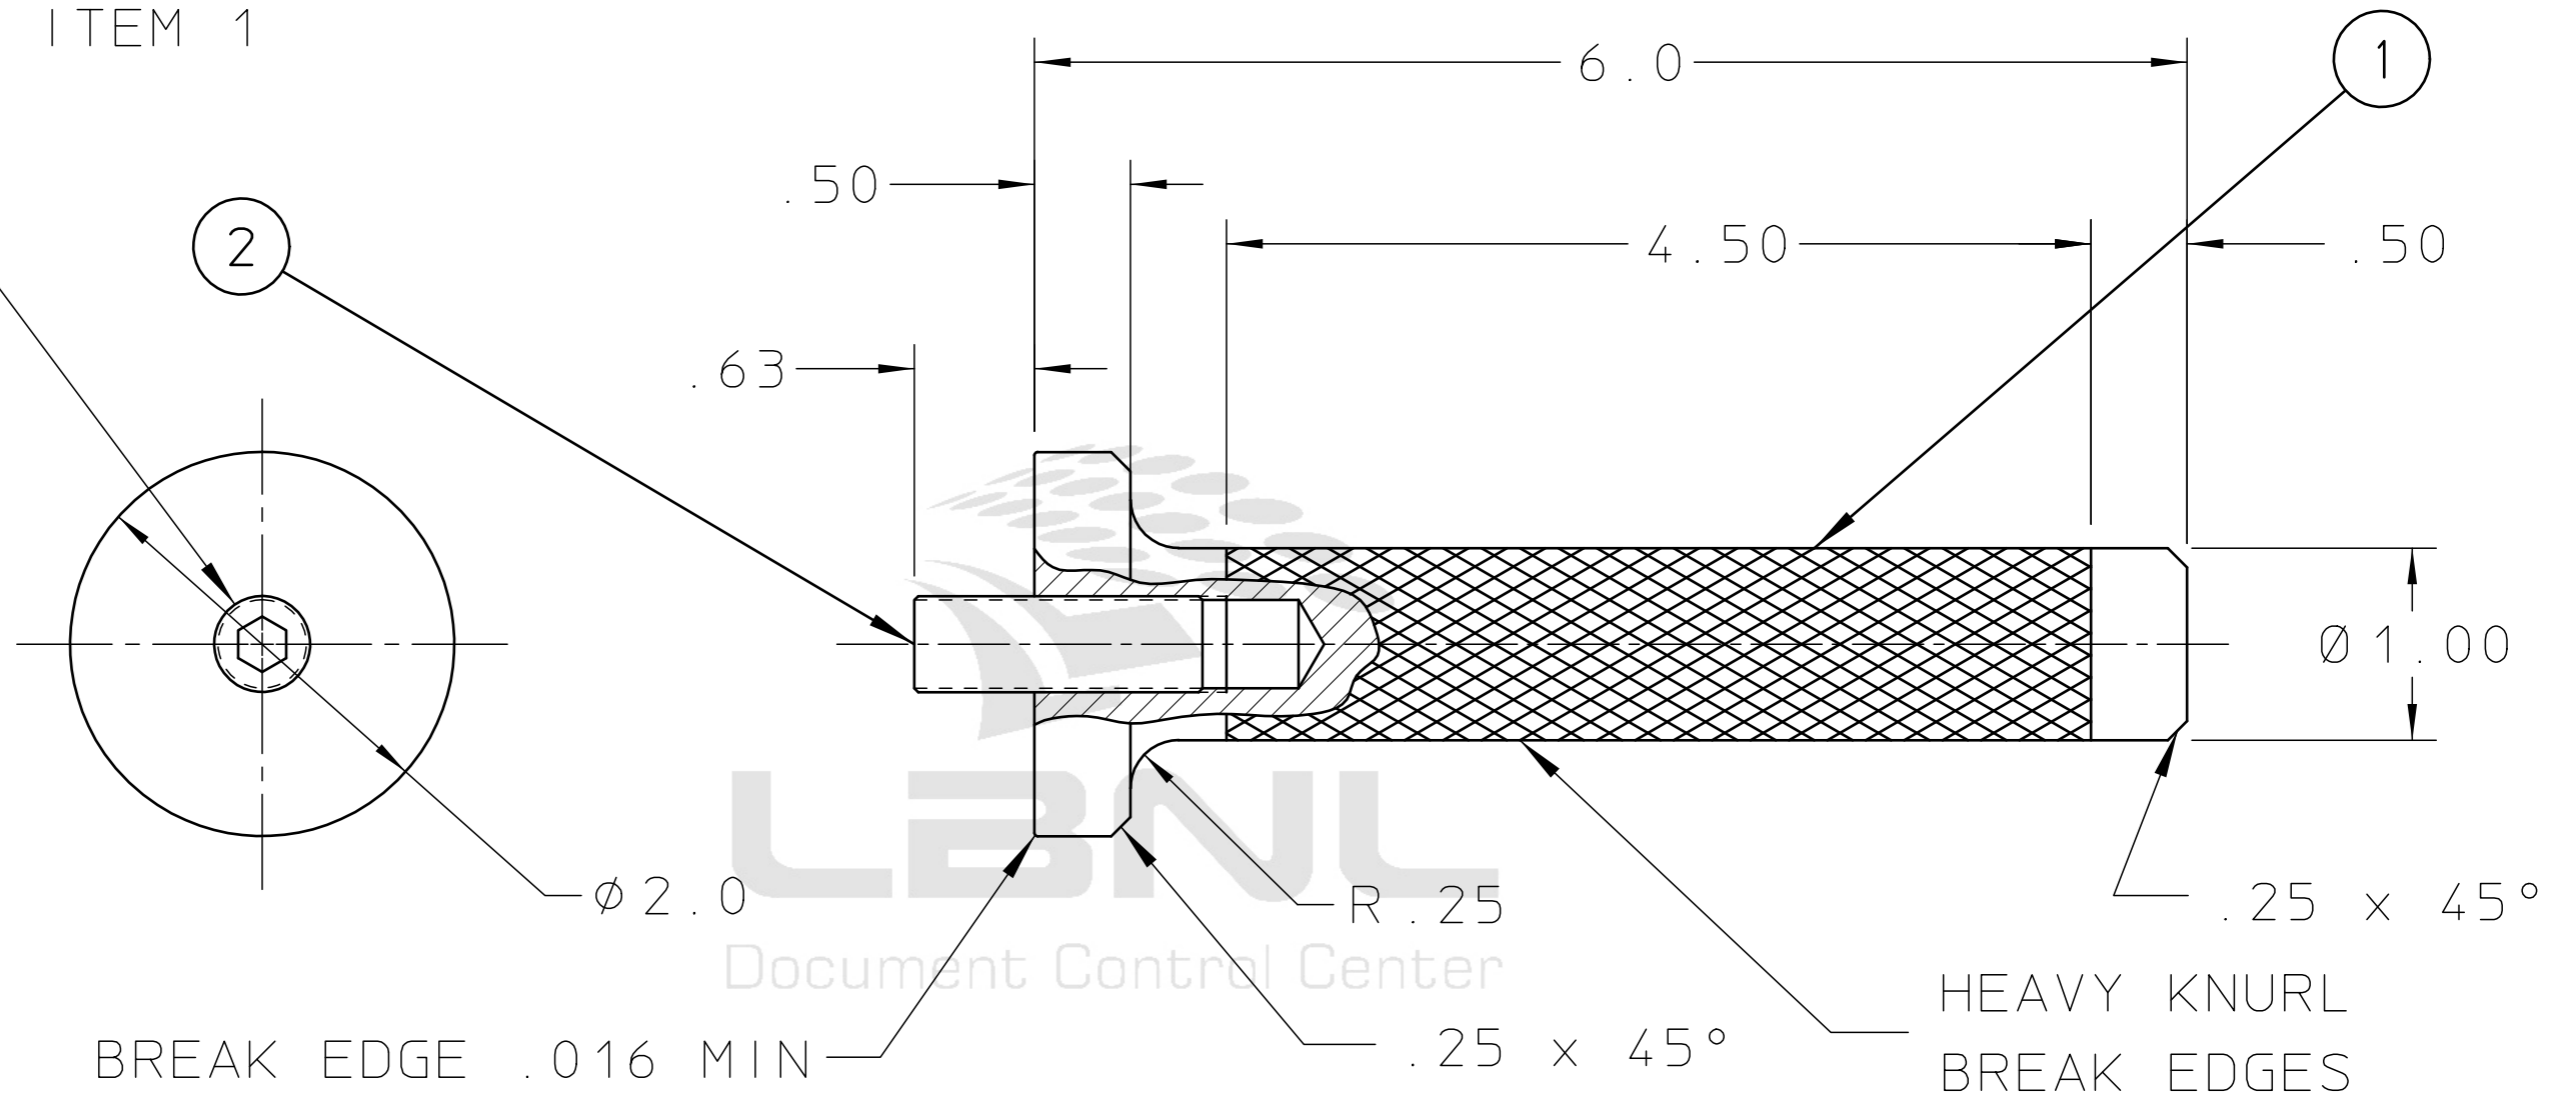

				UNLESS OTHERWISE SPECIFIED	SHOP ORDERS			LAWRENCE BERKELEY LABORATORY				
				TOLERANCE .X ± .1 .XX ± .02 .XXX ± .005	ACCT NO		SER NO		UNIVERSITY OF CALIFORNIA-BERKELEY			
				SURFACE FINISH 125 ✓	DATE ISSD	DATE REQD	NO REQD	RHIC-STAR-TPC				
				1. SAWED, FLAMECUT, SHEARED OR CUT STOCK FINISH. 2. THREADS CLASS 2. 3. CHAMFER ENDS OF ALL SCREW THRDS 30°. 4. 1 1/2 PITCH RELIEF WITH ROUND NOSE TOOL ON ALL MACHINE CUT THRDS. 5. BREAK EDGES 1/64 MAX. ON MACHINE WORK. 6. REMOVE BURRS, LOOSE SCALE AND WELD SPLATTER. 7. REF.-USASI OR ASA STDS SECT Y-14 & B46-1.	DELIVER TO			SECTOR HANDLING FIXTURE				
					SURFACE TREATMENT BLACK ANODIZE IT.1			CARRYING HANDLE				
					IDENTIFIC METHOD STL STMP ± HIGH			PAT CLEAR	DWG TYPE DETAIL	SHOWN ON 24A0354	SCALE: FULL	
					DWG BY J. BOEHM DATE 93-03-16			MICROFILMED	DESIGN ACCT NO 8052-24	CATEGORY CODE SR-02-04	DWG NO 24A0372	REV
REV	DWN	CHK	DATE	DESCRIPTION	CHK BY J. BERCOVITZ	DATE 93-03-16						

Officially Released to the LBNL Document Control Center
Released: DCC Auth Key: GOZH8NDK1W