
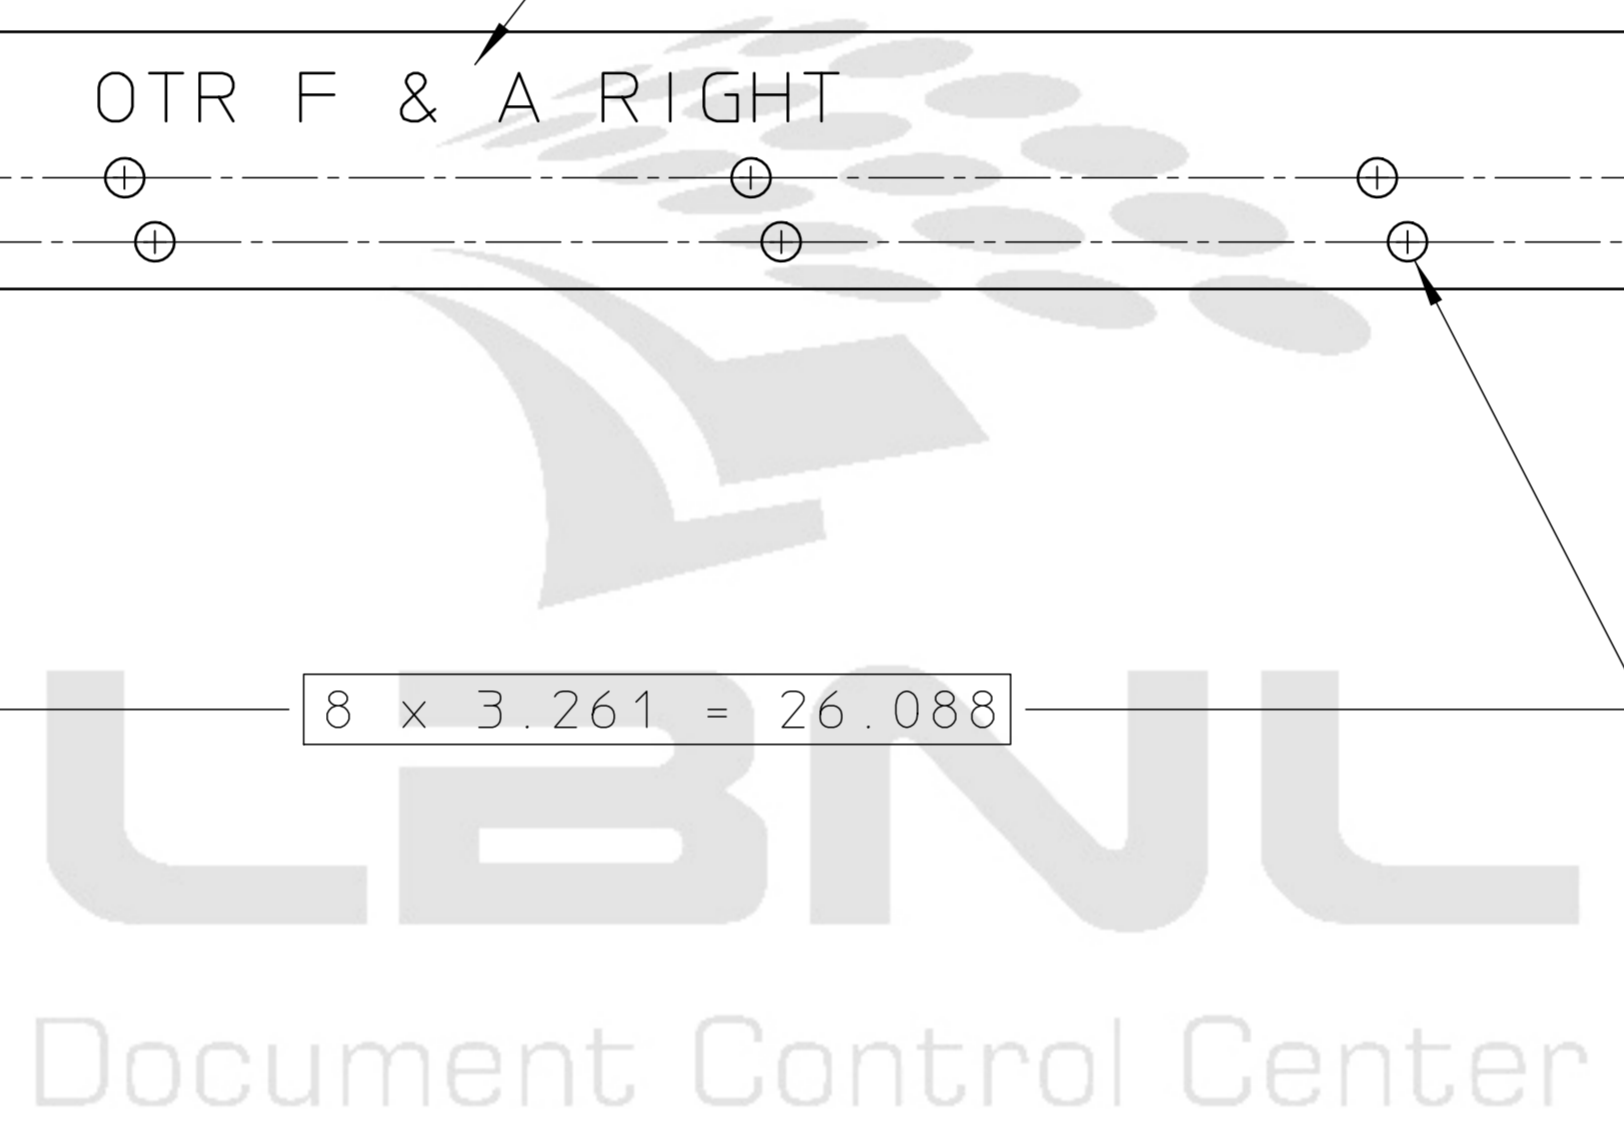


REQ	ITEM	PART NUMBER	DESCRIPTION
			HIGH PRESSURE EPOXY/GLASS LAMINATE, per FED SPECS LP509a,
			type 4 GRADE G-10

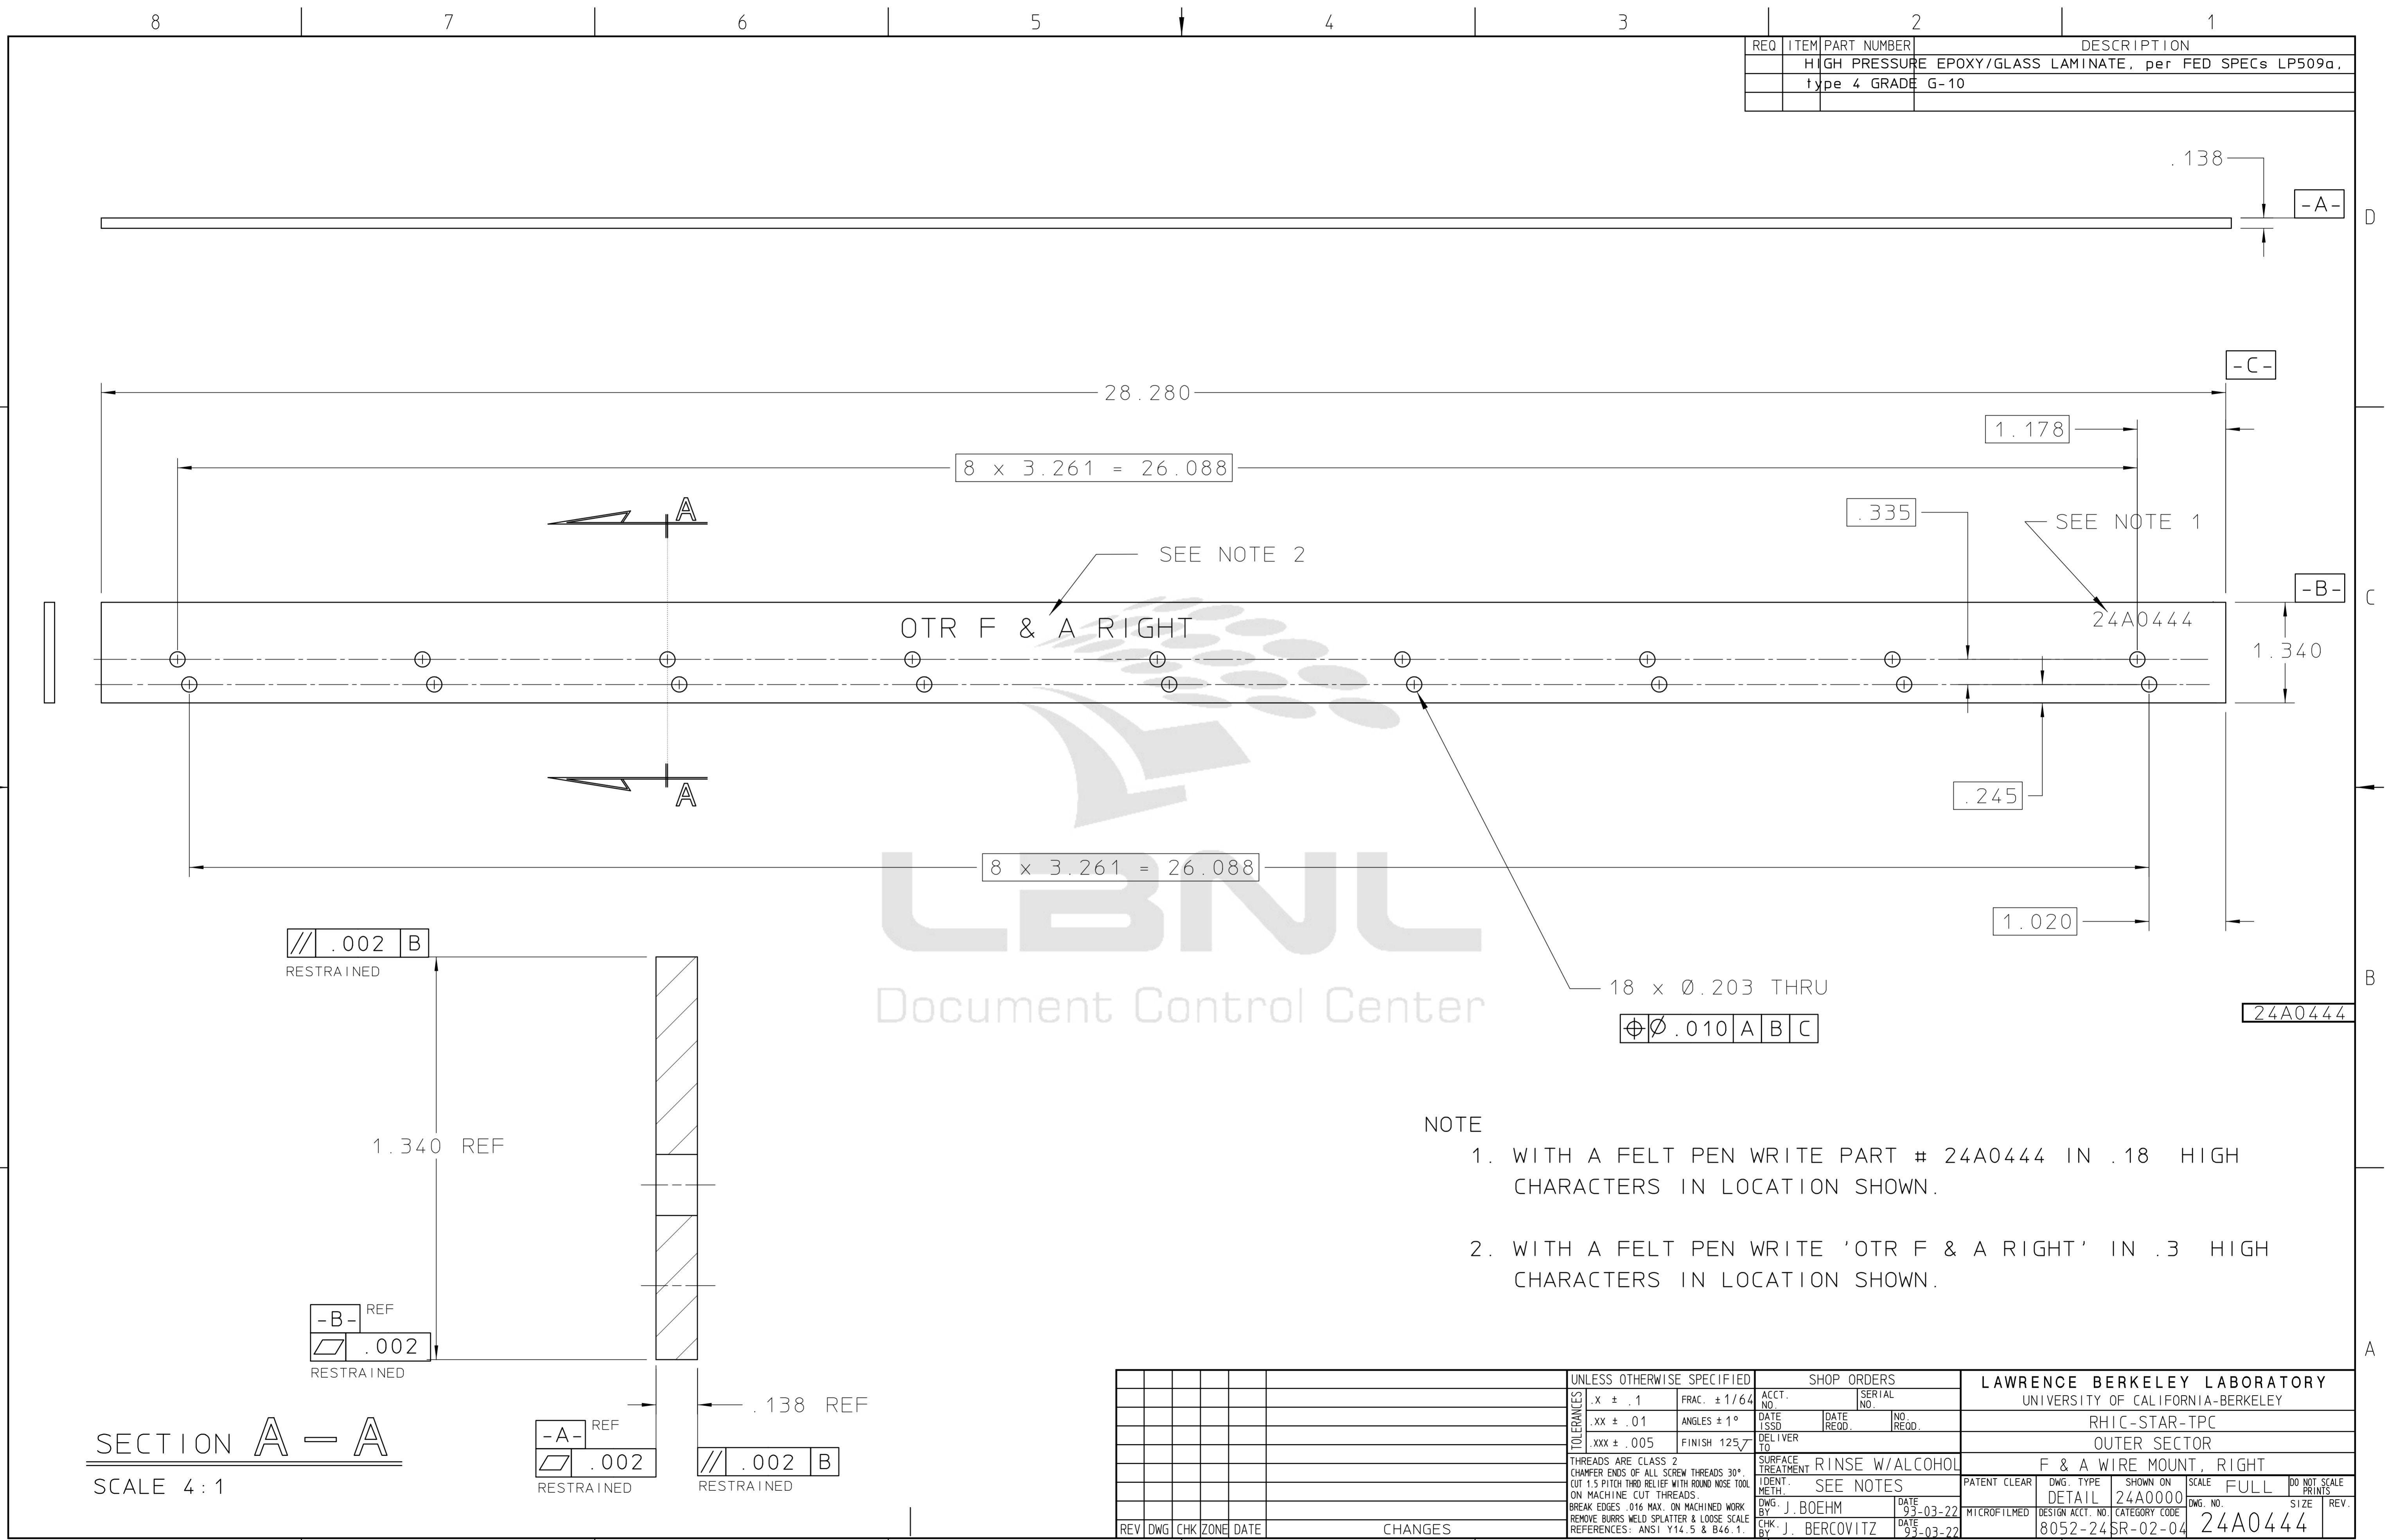

- NOTE
1. WITH A FELT PEN WRITE PART # 24A0444 IN .18 HIGH CHARACTERS IN LOCATION SHOWN.
 2. WITH A FELT PEN WRITE 'OTR F & A RIGHT' IN .3 HIGH CHARACTERS IN LOCATION SHOWN.

SECTION A - A
SCALE 4:1

\parallel .002 B
RESTRAINED

-B- REF
 \parallel .002
RESTRAINED

-A- REF
 \parallel .002
RESTRAINED

\parallel .002 B
RESTRAINED

UNLESS OTHERWISE SPECIFIED				SHOP ORDERS			LAWRENCE BERKELEY LABORATORY					
TOLERANCES		.X ± .1		FRAC. ± 1/64		ACCT. NO.		SERIAL NO.		UNIVERSITY OF CALIFORNIA-BERKELEY		
		.XX ± .01		ANGLES ± 1°		DATE ISSD		DATE RECD.		RHIC-STAR-TPC		
		.XXX ± .005		FINISH 125		DELIVER TO				OUTER SECTOR		
THREADS ARE CLASS 2				SURFACE TREATMENT				RINSE W/ALCOHOL				
CHAMFER ENDS OF ALL SCREW THREADS 30°				IDENT. METH.				SEE NOTES				
CUT 1.5 PITCH THRO RELIEF WITH ROUND NOSE TOOL				PATENT CLEAR				SHOWN ON				
ON MACHINE CUT THREADS.				BY J. BOEHM				DETAIL 24A0000				
BREAK EDGES .016 MAX. ON MACHINED WORK				DATE 93-03-22				SCALE FULL				
REMOVE BURRS WELD SPLATTER & LOOSE SCALE				CHK: J. BERCOVITZ				DWG. NO. 24A0444				
REFERENCES: ANSI Y14.5 & B46.1.				DATE 93-03-22				MICROFILMED				
				DESIGN ACCT. NO. 8052-24				CATEGORY CODE BR-02-04				
								SIZE				
								REV.				
REV	DWG	CHK	ZONE	DATE	CHANGES							