




REQD	ITEM	PART NUMBER	DESCRIPTION
24A0532	HIGH PRESSURE		EPOXY/GLASS LAMINATE, per FED SPEC's LP509a.
	TYPE 4 GRADE	G-10 (DO NOT USE FR-4)	

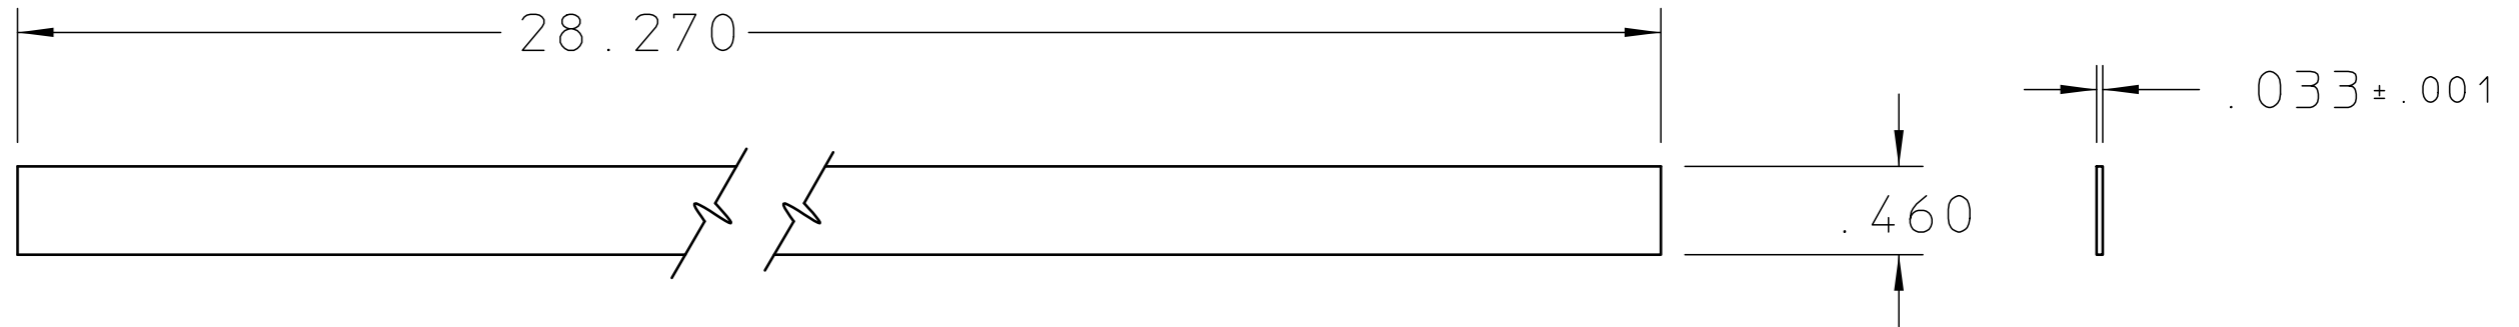

24A0532-1

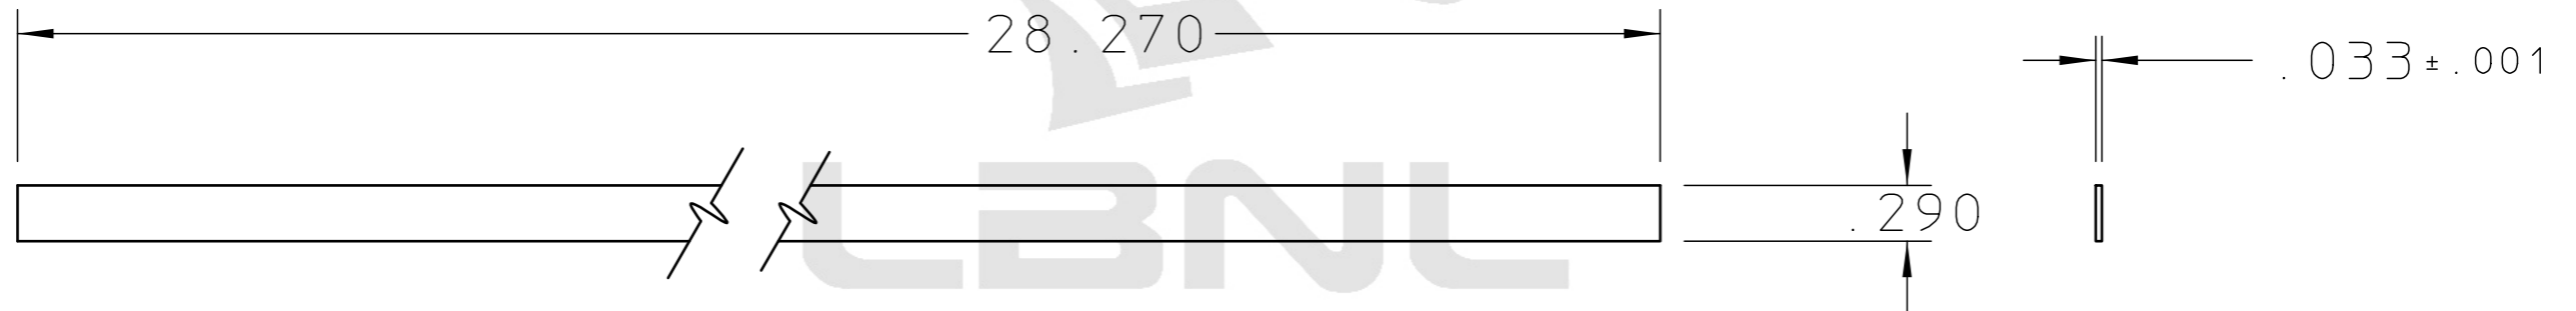

24A0532-2

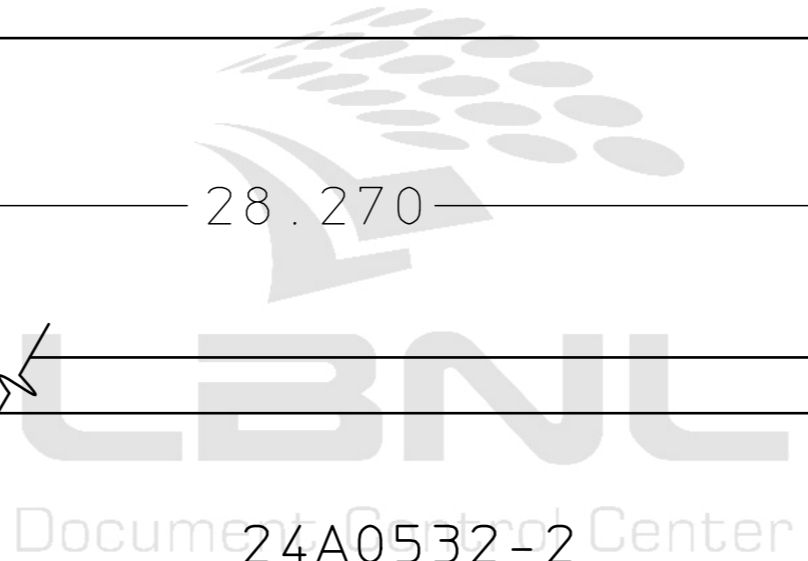

				UNLESS OTHERWISE SPECIFIED	SHOP ORDERS			LAWRENCE BERKELEY LABORATORY			
				TOLERANCE .X ± .1 .XX ± .02 .XXX ± .005	ACCT NO	SER NO		UNIVERSITY OF CALIFORNIA-BERKELEY			
				SURFACE FINISH 125 ✓	DATE ISSD	DATE REQD	NO REQD	RHIC-STAR-TPC			
				1. SAWED, FLAMECUT, SHEARED OR CUT STOCK FINISH. 2. THREADS CLASS 2. 3. CHAMFER ENDS OF ALL SCREW THRDS 30°. 4. 1 1/2 PITCH RELIEF WITH ROUND NOSE TOOL ON ALL MACHINE CUT THRDS. 5. BREAK EDGES 1/64 MAX. ON MACHINE WORK. 6. REMOVE BURRS, LOOSE SCALE AND WELD SPLATTER. 7. REF.-USASI OR ASA STDS SECT Y-14 & B46-1.	DELIVER TO			OUTER SECTOR			
					SURFACE TREATMENT RINSE W/ALCOHOL			WIRED MOUNT INSULATING BOARD			
					IDENTIFIC METHOD BAG & TAG			PAT CLEAR	DWG TYPE	SHOWN ON	SCALE: FULL
					DWG BY J. BOEHM	DATE 93-04-02	MICROFILMED	DESIGN ACCT NO	CATEGORY CODE	DWG NO	REV
REV	DWN	CHK	DATE		DESCRIPTION	CHK BY J. BERCOVITZ	DATE 93-04-02	8052-24	SR-02-04	24A0532	