



REQ	ITEM	PART NUMBER	DESCRIPTION
			HIGH PRESSURE EPOXY/GLASS WEAVE LAMINATE, per FED SPECS
		LP509a, TYPE 4 GRADE G-10 (non-FR-4)	

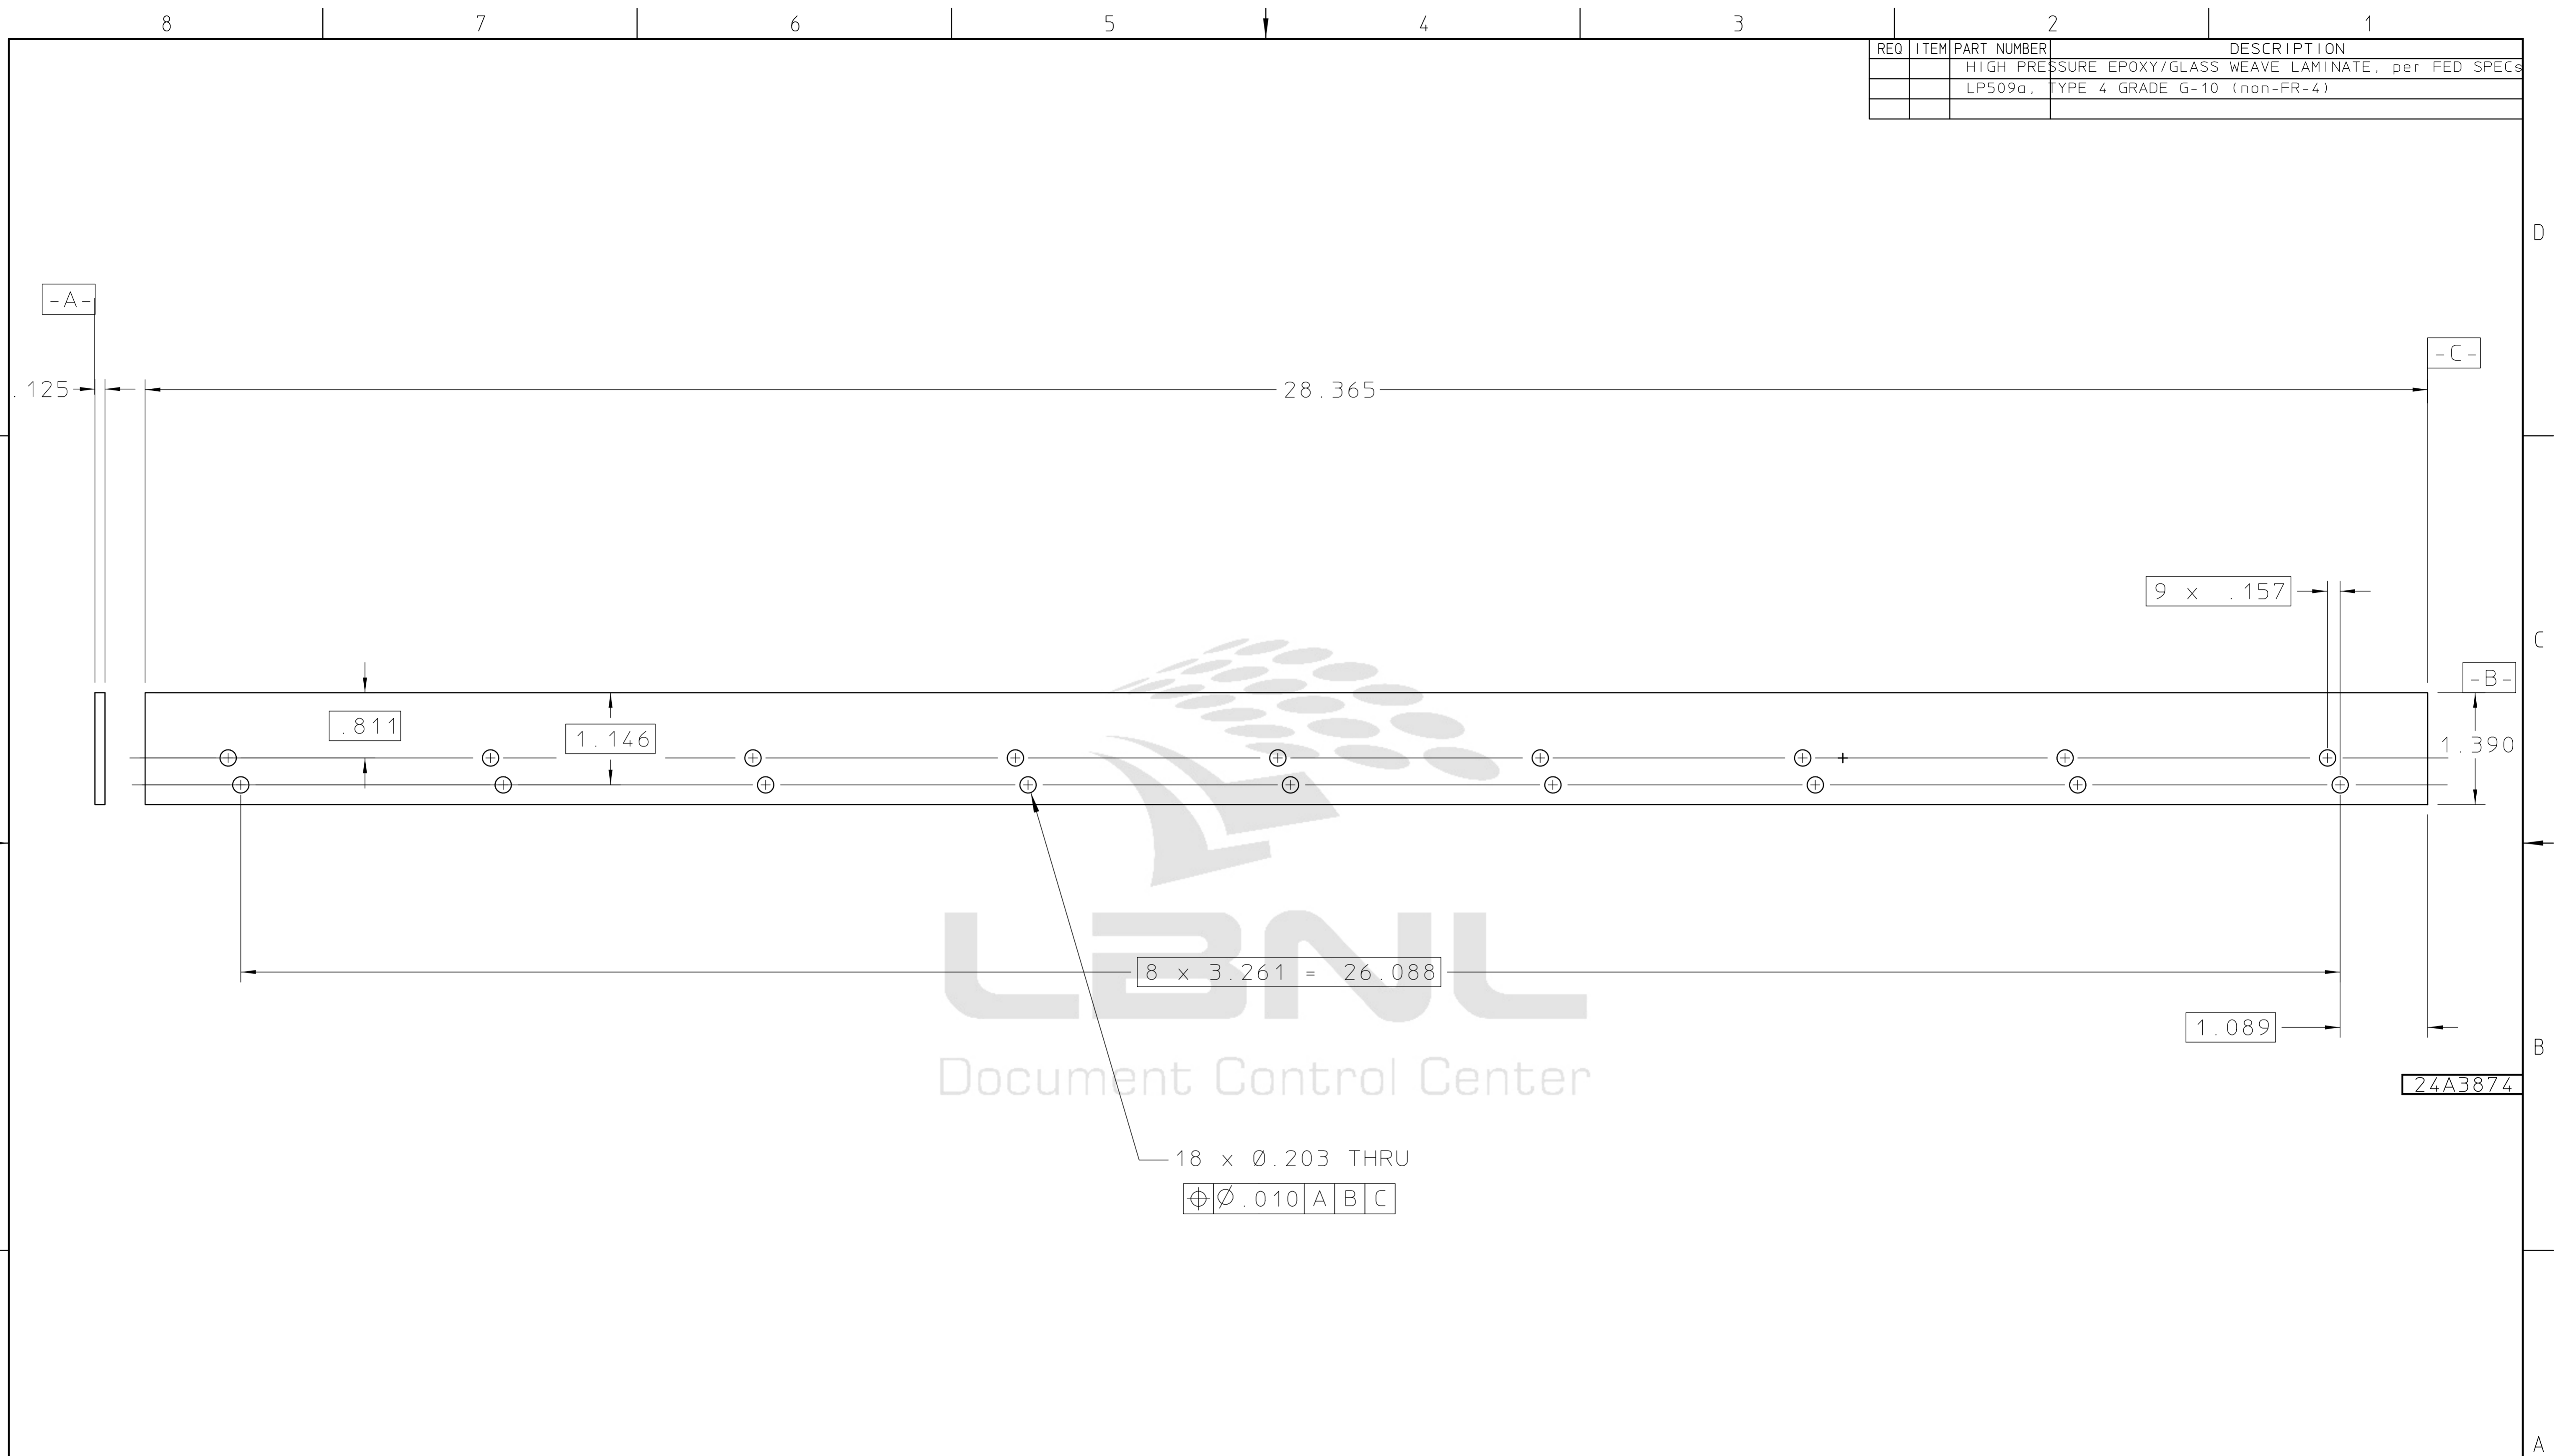

8 x 3.261 = 26.088

18 x Ø.203 THRU

⊕ Ø.010 | A | B | C

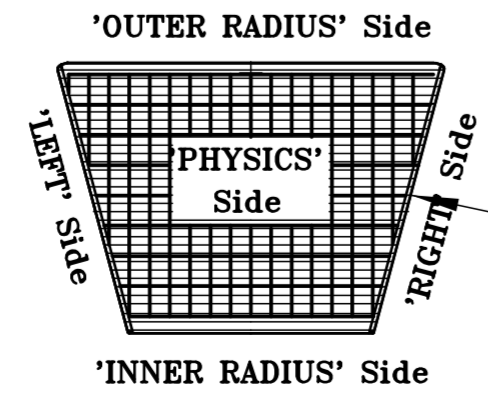

LOCATION OF THIS PART

REV	DWG	CHK	ZONE	DATE	CHANGES	UNLESS OTHERWISE SPECIFIED			SHOP ORDERS			LAWRENCE BERKELEY LABORATORY UNIVERSITY OF CALIFORNIA-BERKELEY							
						TOLERANCES	.X ± .1	FRAC. ± 1/64	ACCT. NO.	SERIAL NO.	DATE ISSD	DATE RECD.	NO. RECD.	RHIC STAR TPC OUTER SECTOR					
							.XX ± .02	ANGLES ± 1°	DELIVER TO	DEGREASE	ANODE WIRE MOUNT, RIGHT			PATENT CLEAR	DWG. TYPE	SHOWN ON	SCALE	DO NOT SCALE PRINTS	
							.XXX ± .005	FINISH 125/7	IDENT. METH.	TAG	MICROFILMED			DESIGN ACCT. NO.	CATEGORY CODE	DWG. NO.	SCALE	REV.	
							THREADS ARE CLASS 2 CHAMFER ENDS OF ALL SCREW THREADS 30° CUT 1.5 PITCH THRU RELIEF WITH ROUND NOSE TOOL ON MACHINE CUT THREADS.		DWG. BY	J. BOEHM	DATE	93-11-15	8052-24	SR-02-04	24A3874				
							BREAK EDGES .016 MAX. ON MACHINED WORK REMOVE BURRS WELD SPLATTER & LOOSE SCALE REFERENCES: ANSI Y14.5 & B46.1.		CHK. BY	J. BERCOVITZ	DATE	93-11-15							