



24A6612-	REQD	ITEM	PART NUMBER	DESCRIPTION
				SEE NOTES

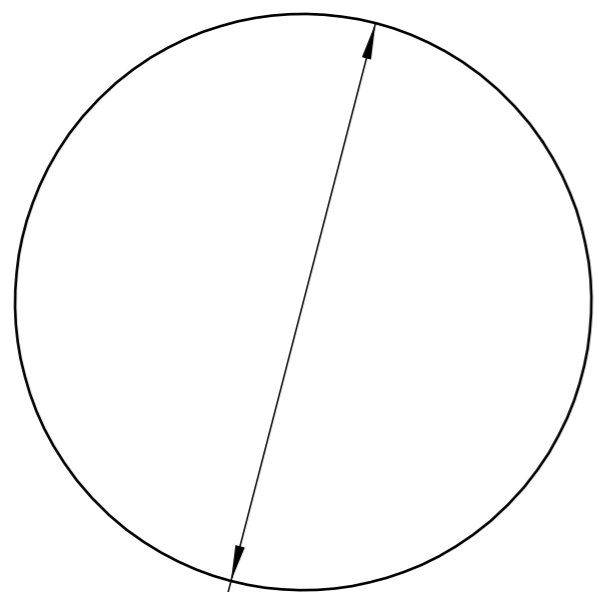

2 x .5 / .02 x 45.0°

LBNL
 Document Control Center

- NOTES:
- DIMENSIONS ARE mm/inch.
 - THIS DRAWING SHOWS THE OUTLINE DIMENSIONS ONLY. FOR MATERIAL AND OPTICAL PERFORMANCE SEE SPECIFICATION ELSEWHERE.
 - CLEAN LENSE PER SPECIFICATIONS AND WRAP IN APPROVED MATERIAL.

				UNLESS OTHERWISE SPECIFIED	SHOP ORDERS			LAWRENCE BERKELEY LABORATORY				
				TOLERANCE .X ± .1 .XX ± .02 .XXX ± .005	ACCT NO	SER NO		UNIVERSITY OF CALIFORNIA-BERKELEY				
				SURFACE FINISH 125 ✓	DATE ISSD	DATE REQD	NO REQD	RHIC-STAR-TPC				
				1. SAWED, FLAMECUT, SHEARED OR CUT STOCK FINISH. 2. THREADS CLASS 2. 3. CHAMFER ENDS OF ALL SCREW THRDS 30°. 4. 1 1/2 PITCH RELIEF WITH ROUND NOSE TOOL ON ALL MACHINE CUT THRDS. 5. BREAK EDGES 1/64 MAX. ON MACHINE WORK. 6. REMOVE BURRS, LOOSE SCALE AND WELD SPLATTER. 7. REF.-USASI OR ASA STDS SECT Y-14 & B46-1.	DELIVER TO			LASER ASSEMBLY				
					SURFACE TREATMENT SEE NOTES			MIRROR, KNEE, DIMENS PARAMETERS				
					IDENTIFIC METHOD BAG & TAG			PAT CLEAR	DWG TYPE	SHOWN ON	SCALE: FULL	
					DWG BY J. BOEHM	DATE 95-02-24			DETAIL	00X0000	DO NOT SCALE PRINTS	
REV	DWN	CHK	DATE	DESCRIPTION	CHK BY A. LEBEDEV	DATE 95-02-24	MICROFILMED	DESIGN ACCT NO 8052-26	CATEGORY CODE SR0204	DWG NO 24A6642-	REV	